
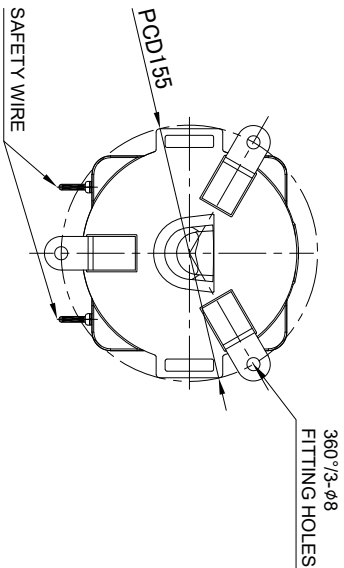


MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO		QNES			
MATERIAL		HOUSING-AL			
		LENS-TEMPERED GLASS			
		PROTECTION CAGE-SUS316L			
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE()			
FLASHING PER MIN.		FLASHING - 60-80			
		LED STROBE - 70-80			
		LED ROTATE - 60-80			
USE VOLT.	LED	DC12-24V	0.2W	MAX. 1.6A	
	CURRENT	AC110-230V		MAX. 0.3A	
VOLUME		MAX. 110dB			
PROTECTION GRADE		WATER & DUST PROOF IP66			
CABLE ENTRY		1/2" NPT			
COLOR OF HOUSING		RED			
ACTION		LED STEADY / FLASHING / STROBE / ROTATE			

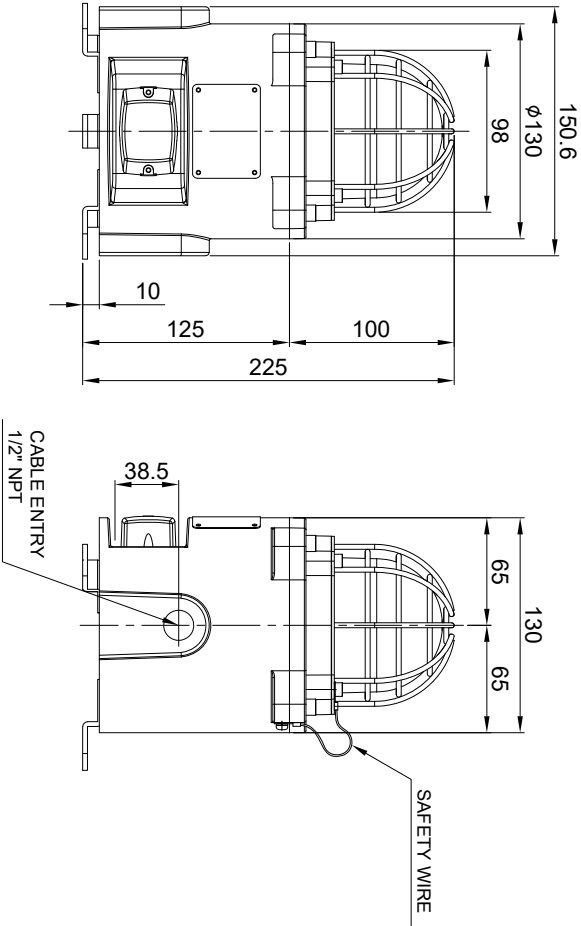

ISO2768-1 : CLASS OF TOLERANCE

FOR LINEAR DIMENSIONS		f	m	Ⓢ	v	SURFACE FINISH	
0.5~3		±0.05	±0.1	±0.2	-		
3~6		±0.1	±0.2	±0.3	±0.5		
6~30		±0.15	±0.3	±0.5	±1		
30~120		±0.2	±0.5	±1.2	±2.5		
120~400		±0.3	±0.8	±2	±4		
400~1000		±1°	±1°30'	±3°			
0~10		±0°30'	±1°	±2°			
10~50		±0°20'	±0°30'	±1°			
50~120		±0°10'	±0°13'	±0°30'			
120~400							

FOR ANGULAR DIMENSIONS		±0°10'	±0°13'	±0°30'
------------------------	--	--------	--------	--------

TITLE		QNES		QNES	
OUTLINE DRAWING		QNES		QNES	

DWG. NO.		QNES_OUT	
----------	--	----------	--

SCALE	SIZE	REV	SHEET
N/S	A4	00	1/1